


Unibond[®] Plus Bloc

For High Performance Environments



Unibond[®] Plus Bloc is an advanced high performance backing system designed to provide long term carpet durability and protection from liquid spills while delivering sustainable benefits. The Unibond[®] Plus Bloc backing system utilizes a high performance thermoset adhesive designed to deliver greater dimensional stability and long term performance by encapsulating the carpet back stitch, and securing the secondary backing to the substrate. This advanced thermoset adhesive contains a minimum of 30% pre-consumer recycle content by total product weight. The secondary application coat utilizes a specialized water-resistant impermeable composite rubber-latex compound to prevent moisture penetration beneath the carpet backing. Unibond[®] Plus Bloc is ideal for high performance environments prone to frequent spills.

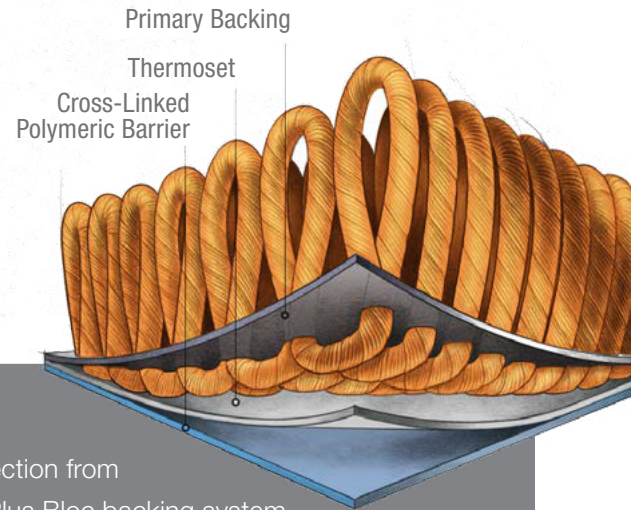

PERFORMANCE

- High performance backing designed for demanding commercial environments
- Greater dimensional stability - no growing or shrinking
- High tuft bind properties
- Eliminates edge ravel and zippering
- For use with direct glue installations only
- Limited Lifetime Warranty protects against tuft bind, edge ravel, zippering, delamination and moisture barrier
- Passes British Spill Test



BUDGET

- Excellent choice for demanding commercial environments
- High performance backing offering meets most budget requirements



SUSTAINABILITY

- Recyclable
- Contains a minimum 30% pre-consumer recycle content by total product weight
- May contribute to or comply with LEED credits MR 4.0,

MR 5.0, IEQ 4.3 and innovation credit for NSF 140

- Certified Gold in accordance with NSF / ANSI 140
- Certified low VOC's under CRI Green Label Plus Program
- Compliant with LEED EQ 4.1 low VOC emitting when installed with Mohawk Group recommended adhesive and seam sealer



SERVICE

- Products available through Quickship offering (up to 2,000 square yards within 10 business days)

INSTALLATION SPECIFICATIONS

Backing	Adhesive	Adhesive Application Method	Moisture & pH	Spread Rate	Seam Sealer
Unibond® Plus Bloc	Mohawk NuBroadlok® Premium Multi-Purpose	Direct Glue: 1/8" x 1/8" x 1/8" U Notch Trowel Direct Glue: 1/8" x 1/8" x 1/16" V Notch Trowel	5lbs/ 80% RH, 5-9 pH	8-10 SY/Gal	Mohawk NuBroadlok® Latex Seam Sealer

Mohawk OptiSeal™ required for installations with subfloor moisture exceeding 5 lbs and/or 80% RH. Maximum allowable moisture with OptiSeal™ is 90% RH.

LIFETIME LIMITED WARRANTY*

LIFETIME LIMITED WEAR

Maintains at least 90% of surface pile weight

LIFETIME LIMITED TUFT BIND

Superior tuft bind capabilities in high traffic environments

LIFETIME LIMITED STATIC PROTECTION

Will not give static discharge above 3.5KV

LIFETIME LIMITED EDGE RAVEL

Ends will not ravel in normal use
(seam sealer required for Unibond® Plus Bloc installations)

LIFETIME LIMITED ZIPPERING

Will not zipper or develop continuous yarn runs

LIFETIME LIMITED DELAMINATION

Will not delaminate (separate from the backing)

LIFETIME LIMITED DIMENSIONAL STABILITY

Will not shrink or grow and will not be affected by atmosphere, temperature, or humidity

LIFETIME LIMITED MOISTURE RESISTANCE

Keeps liquids from penetrating through the backing system

* See Mohawk Group official warranty documents for further details at www.mohawkgroup.com

LEED and the related logo is a trademark owned by the U.S. Green Building Council and is used with permission.